


STORAGE POSITION

Bleacher framework shall be constructed of welded aluminum angles and bolt-on horizontal support members. Seat planks and foot planks shall be 10" wide x 1 3/4" thick, clear anodized (seat only) aluminum extrusions with aluminum end caps and be mounted on two steel support frames. For Powder Coated Aluminum Seat Planks order optional BL21SEAT1-XX for each plank. Choose any combination of colors: Royal, Scarlet, Navy, Forest Green, Black and White. When in use, bleachers shall sit on six non-marking rubber feet. When tipped up to transport and store, bleachers shall rest on six non-marking 3" diameter swivel casters. Bleachers shall provide three rows of 21' seating with a total approximate capacity of 42 persons. Bleacher structure shall have a 5-year limited warranty and seat and foot planks shall have a 2-year limited warranty. Installation to be completed in accordance to manufacturer's instructions. Meets ICC300-2023 specifications if correctly installed and maintained. Do not scale drawings. Approximate weight shall be 350# each.

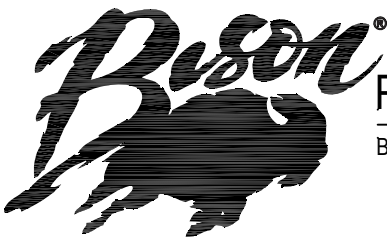

## PRODUCT SPECIFICATION

BLI2103 EASY STORE™ 21', 3-TIER INDOOR ALL ALUMINUM PORTABLE BLEACHERS

REVISED 11/06/24 L.M.